


Features

- Precision phase matching
- Ultra-wideband operation
- Very stable performance under flexing and movement
- Excellent durability and flexibility

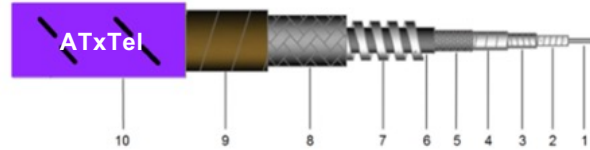

Applications

- 5G Massive MIMO Test
- Antenna OTA Test
- Phase Array Test Systems
- 5G Switch and Attenuator Matrix Systems

Model	Outer Diameter (mm)	Operating Frequency (GHz)	Working Voltage (Vrms)	Amplitude Stability @40GHz	Bending Phase Stability @40GHz	Time Delay Match @40GHz	Attenuation (Typical Value @ 25°C & Sea Level) for 5FT cable length					
							1GHz	2GHz	4GHz	10GHz	18GHz	40GHz
MI B02	6.0	40	1400	<±0.05dB	<±3°	<±0.5ps	0.53	0.73	1.05	1.85	2.51	3.84